


### 产品特点

- 10.4" / 12.1" / 15.0" / 17.0"工业级液晶屏
- 全平面一体设计
- 工业级多点触控电容屏or工业级五线电阻触摸屏
- VGA , HDMI 视频输入接口
- 2 x USB2.0 输出接口
- 前面板IP66防护等级
- 支持前面板、壁挂、桌面式安装
- DC 12~24V直流宽电压输入


### 规格参数

型号	KPC-WKM104A	KPC-WKM121A	KPC-WKM150A	KPC-WKM170A	
显示	LCD尺寸	10.4"	12.1"	15.0"	17.0"
	屏幕宽高比	4:3	16:10	4:3	5:4
	最高分辨率	1024 × 768	1280 × 800	1024 × 768	1280 × 1024
	亮度	450 cd / m <sup>2</sup>	400 cd / m <sup>2</sup>	350 cd / m <sup>2</sup>	250 cd / m <sup>2</sup>
	背光寿命	30000Hr	30000Hr	50000Hr	50000Hr
	背光类型	LED	LED	LED	LED
视角	(L)75 / (R)75 / (T)75 / (B)75	(L)80 / (R)80 / (T)80 / (B)80	(L)80 / (R)80 / (T)80 / (B)80	(L)85 / (R)85 / (T)80 / (B)80	
触摸	类型	Projected Capacitive Touch	5-Wire Resistive or Projected Capacitive Touch(Optional)	Projected Capacitive Touch	Projected Capacitive Touch
	多点触控	电容(多点触控)	电容(多点触控) 电阻(单点)	电容(多点触控)	电容(多点触控)
视频端口(输入)	VGA x 1 HDMI x 1		VGA x 1 HDMI x 1		
I/O端口	USB2.0 x 2		USB2.0 x 2		
调节按键	POWER ON/OFF RIGHT LEFT MENU EXIT		POWER ON/OFF RIGHT LEFT MENU EXIT		
电源输入电压(V)	DC 12 ~ 24V		DC 12 ~ 24V		
外壳材质	Front Panel: Die-cast Aluminum alloy, Rear Cover: SECC		Front Panel: Die-cast Aluminum alloy, Rear Cover: SECC		
尺寸(WxDxH)(mm)	298.5 × 238.5 × 47	328 × 239 × 47	371 × 295 × 47	428 × 342 × 47	
安装方式	Panel mount, Desktop, Wall and VESA 100mm × 100mm mount ( With Optional Kit )				
面板安装开孔尺寸(mm)	282 × 222	310 × 222	354 × 278	411 × 325	
操作系统	配合主机使用		配合主机使用		
IP防护等级	Front Panel IP66		Front Panel IP66		
认证	CE VCCI Class A,UL		CE VCCI Class A,UL		
环境	工作温度	-20℃~70℃(-4℉~158℉) Natural convection	-20℃~70℃(-4℉~158℉) Natural convection	-20℃~70℃(-4℉~158℉) Natural convection	-20℃~60℃(-4℉~140℉) Natural convection
	工作相对湿度	10%~90%RH @31℃(87.8℉) Non-condensing			
	存储温度	-30℃~80℃(-22℉~176℉) Natural convection	-30℃~80℃(-22℉~176℉) Natural convection	-30℃~70℃(-22℉~158℉) Natural convection	-30℃~70℃(-22℉~158℉) Natural convection
	存储相对湿度	10%~95%RH @40℃(104℉) Non-condensing			
	机械冲击	HS 40g 2ms(Operational) HS 140g 2ms(Non-operational)		HS 40g 2ms(Operational) HS 140g 2ms(Non-operational)	
振动	10~500Hz 1.04Grms(Operational) 10~500Hz 3.5Grms(Non-operational)		10~500Hz 1.04Grms(Operational) 10~500Hz 3.5Grms(Non-operational)		

# KPC-WKM104A/121A/150A/170A I/O 接口

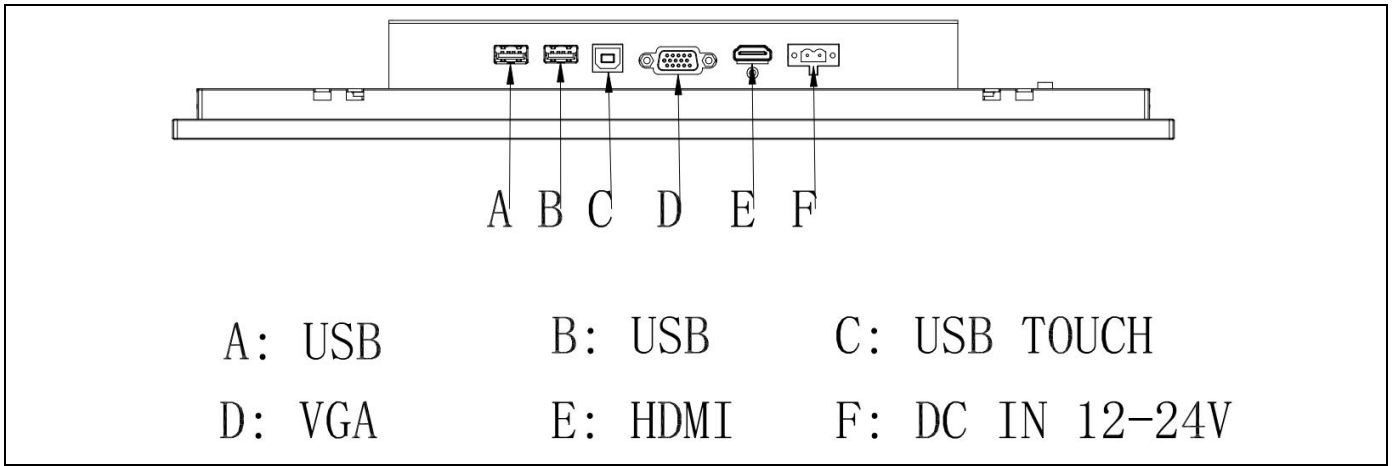

尺寸      单位:mm

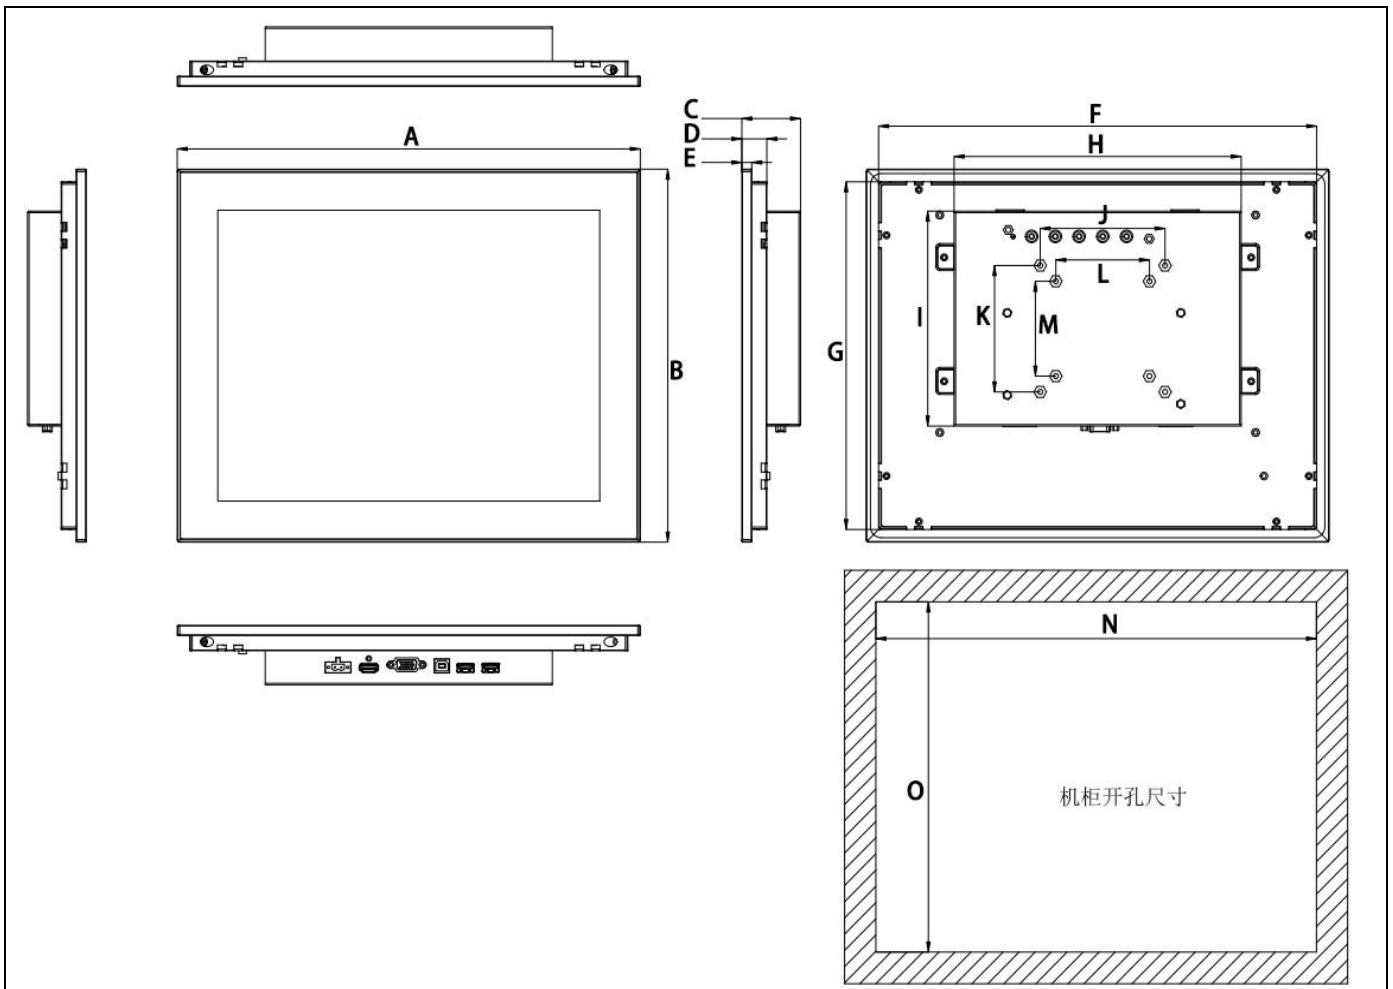

型号	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
KPC-WKM104A	298.5	238.5	47	20	8	278.5	218.5	230	170	100	100	75	75	282	222
KPC-WKM121A	328	239	47	20	8	308	219	230	170	100	100	75	75	310	222
KPC-WKM150A	371	295	47	20	8	351	275	230	170	100	100	75	75	354	278
KPC-WKM170A	428	342	47	20	8	408	322	230	170	100	100	75	75	411	325

\* 参数如有变更恕不另行通知  
 \* 请参考FOXKPC工业显示器选型表  
 \* 如需下载产品使用手册或 Datasheet , 请登录 [www.foxkpc.com](http://www.foxkpc.com)